

# HDLED screen advertising machine

Higher Definition, More Convenient, More Hassle-Free



# LED active light-emitting, 3 times brighter than liquid crystal

0.64\*1.92 meters full-screen display, shocking display, 20 meters visual distance, video advertising message delivery faster step, more intelligent and innovative, can be moved at any time.



display area	640mmX1920mm
Box weight	Stand model: 23.5kg (without kit and power supply)
	Base model: 35.3Kg (without kit and power supply)
material	Iron + Aluminum
Number of kits per box	24 modules per case
Installation	Rack or base mounting
color	Black (customized)
operating environment	interior

Batch can be customized size



# Intelligent and convenient operation management

You can use mobile phone/computer/WIFI/U disk control to install the background release software, through the background of the remote release to the LED poster screen, through the remote release of pictures, video, text scrolling and so on.



work out the difference



Too many terminals to manage



Frequent changes to advertisements




Publish remotely anytime, anywhere



Backend publishing software is easy to use and portable

# Intelligent Management APP

Easy uploading of content using mobile phone/computer/WIFI/U disk control for unified playback and management

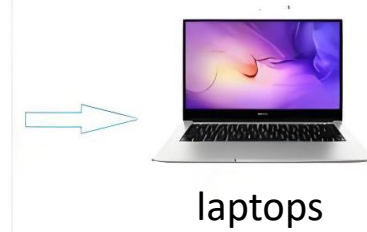

# High-quality “chips”


Each function has a separate chip to ensure that the product meets the performance requirements.



Imported  
Chips








Intelligent  
Protection

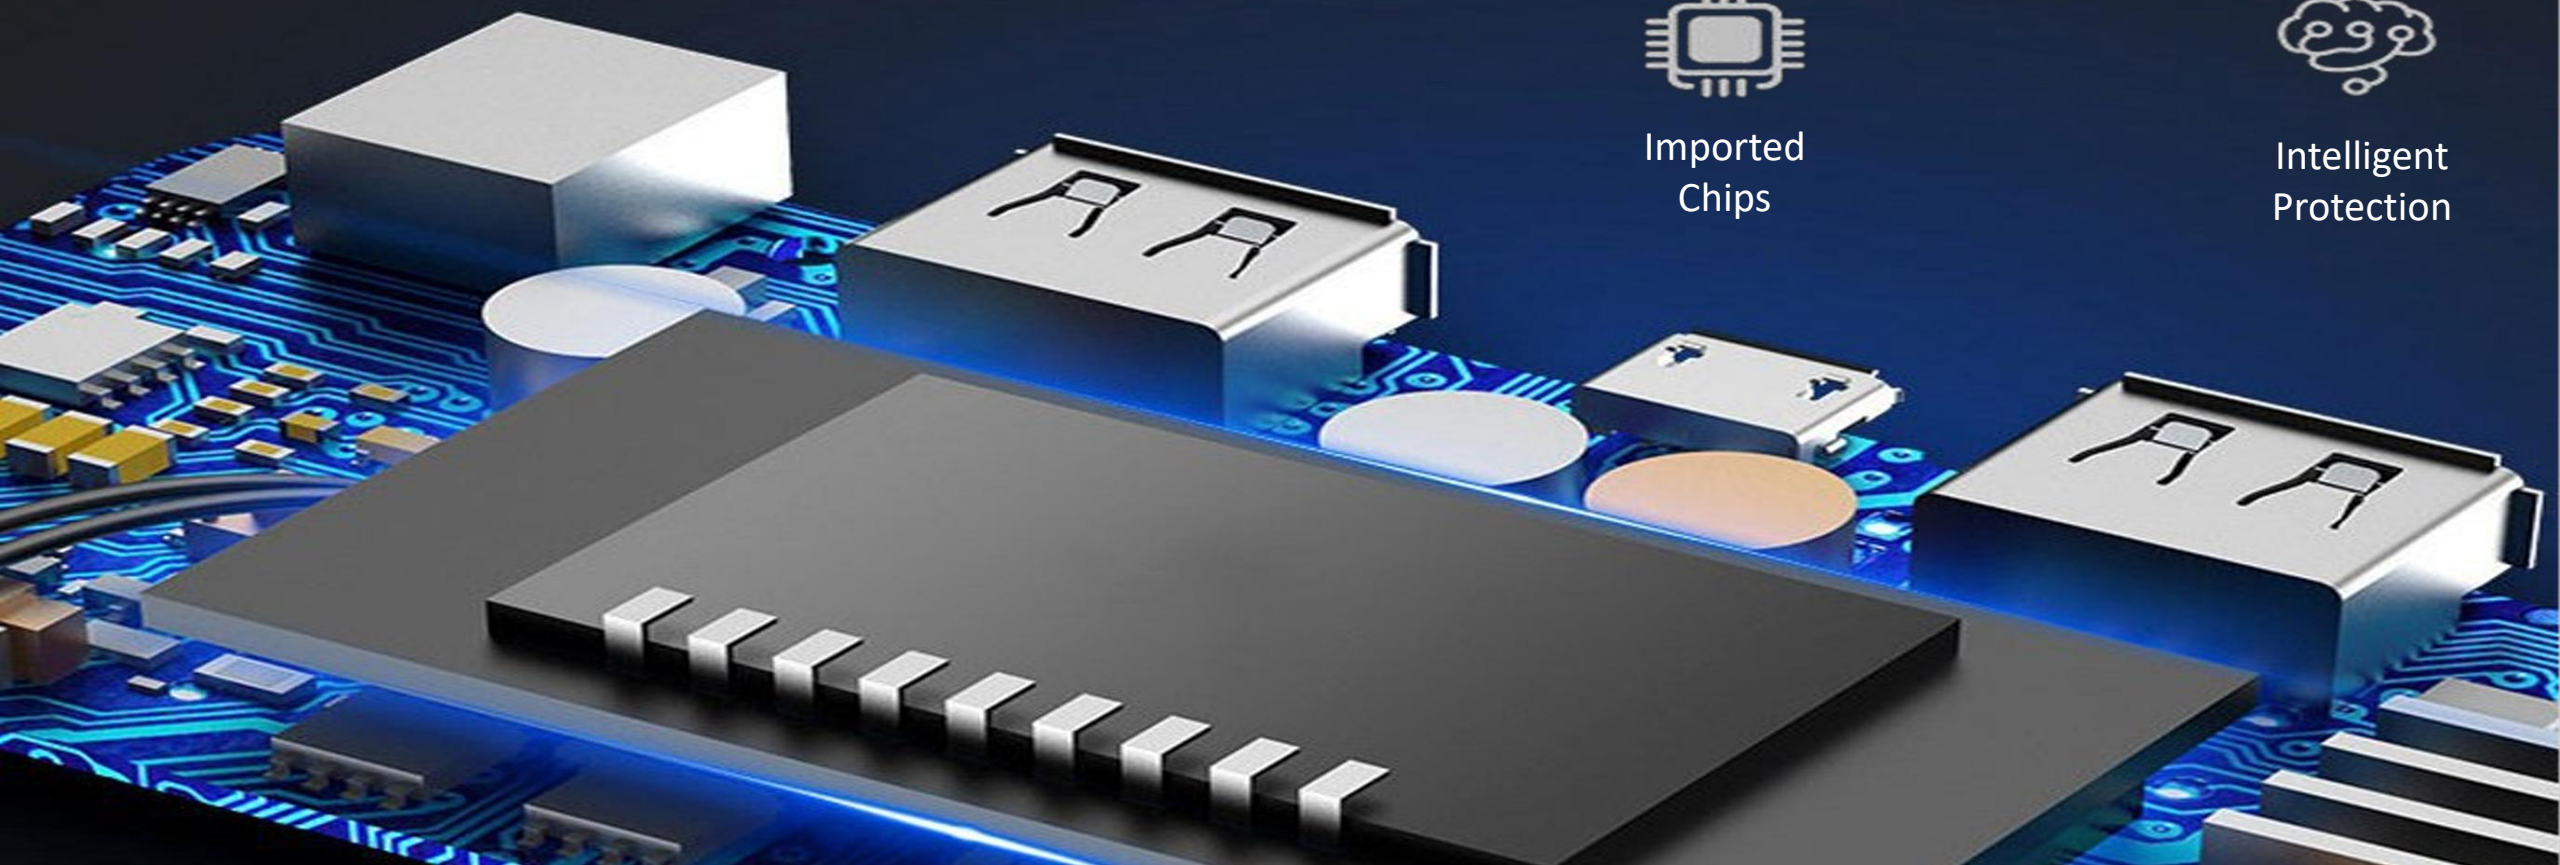




# Split screen playback Seamless splicing

The same screen multi-screen split mode playback split-screen mode, using the management APP can simultaneously control multiple screens at the same time, mirror mode can use the management APP can simultaneously control multiple screens at the same time, play the same content.

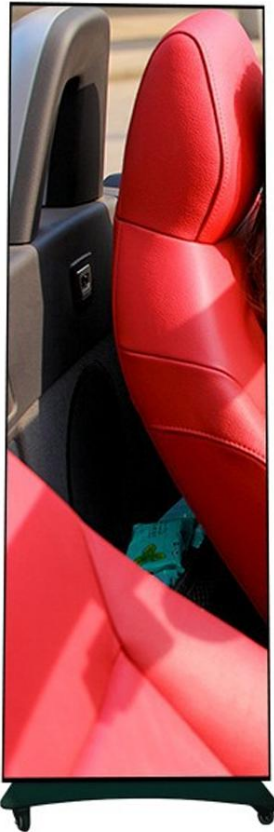

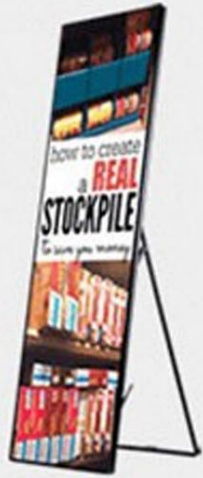

resting on one's back



Creative Installation



Standing installation



Hanging installation



Multi-screen cascade

## Multiple mounting options

A variety of installation methods can be adapted to the needs of your various places to support hanging, wall mounting, seat mounting, diagonal brace mounting, and other installation methods.

# Product Parameters

Product Model	P2. 5	P2	P1. 86	P1. 538	P1. 25
pixel pitch	2. 5mm	2mm	1. 86mm	1. 538mm	1. 25mm
pixel composition	SMD2121	SMD1515	SMD1515	SMD1212	SMD1010
pixel density	160000dot/m2	250000dot/m2	284444dot/m2	422750dot/m2	640000dot/m2
Module Size	320*160mm	320*160mm	320*160mm	320*160mm	320*160mm
Module Resolution	128*64dot	160*80dot	172*86dot	208*104dot	256*128dot
Box size	640*1920mm	640*1920mm	640*1920mm	640*1920mm	640*1920mm
Box Resolution	256*768dot	320*960dot	344*1032dot	416*1248dot	512*1536dot
weights	46kg	46kg	46kg	46kg	49kg
brightness level	>600CD/m2	>600CD/m2	>600CD/m2	>600CD/m2	>600CD/m2
viewing angle	160° /160°	160° /160°	160° /160°	160° /160°	160° /160°
viewing distance	>2m	>2m	>2m	>2m	>2m
grayscale level	14bit	14bit	14bit	14bit	14bit
Color Type	16. 7M	16. 7M	16. 7M	16. 7M	16. 7M
brightness adjustment	0-100 levels adjustable	0-100 levels adjustable	0-100 levels adjustable	0-100 levels adjustable	0-100 levels adjustable
maximum power	680W/m2	680W/m2	680W/m2	680W/m2	1000W/m2
average power	230w/m2	230w/m2	230w/m2	230w/m2	300w/m2
Scanning method	1/32S	1/40S	1/43S	1/52S	1/64S
refresh rate	≥1920HZ	>3840HZ	>3840HZ	>3840HZ	>3840HZ
operating environment	interior				
Supported signal input types	HDMI, USB, cell phone wif wireless 4G				
Input Power	AC100-240 50/60HZ				
operating temperature	-20℃--+50℃				
Operating humidity	10-95% RH				
working life	50,000hours				
Other models and sizes can be customized according to customer requirements					